


High Quality Class Fan

sleeved cable - ultrasilent bearing - designed in germany

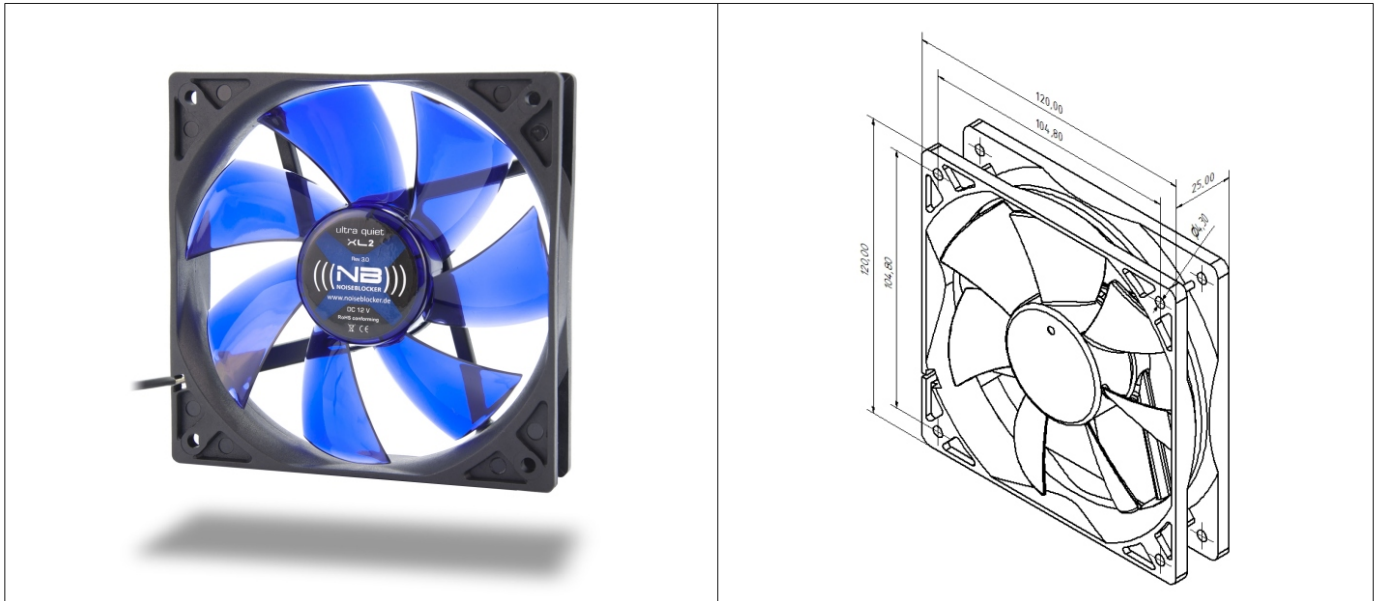

	XL-1	XL-2	XLP (PWM)
Maße/ size (mm)	: 120x120x25mm	: 120x120x25mm	: 120x120x25mm
Gewicht/ weight (g)	: 120 g	: 120 g	: 125 g
Nennspannung/ rated voltage (V)	: 5-13,2 V	: 4-13,2 V	: 4,5-13,2 V
Startspannung/ start voltage (V)	: 5 V	: 4 V	: 4,5 V
Leistungsaufnahme/ input power voltage (W)	: 0,96 Watt	: 1,80 Watt	: 2,64 Watt
Nennzahl (U/min)/ rpm (12V)	: 1000 +/- 10%	: 1500 +/- 10%	: 1000-2000 +/- 10%
Luffförderleistung/ air flow (m ³ /h)	: 69 m ³ /h	: 98 m ³ /h	: 69-128 m ³ /h
Luffförderleistung/ air flow (CFM)	: 41 cfm	: 58 cfm	: 41-75 cfm
Betrieblautstärke/ acoustical noise (dB/A)	: 13 dB/A	: 21 dB/A	: 14-31 dB/A
Lifetime MTBF (25° C/ or 77° F) (hours)	: 80 000 Std. / h	: 80 000 Std./ h	: 75 000 Std./ h
Temperaturbereich/ operating temperature	: -10°C~ +65°C	: -10°C~ +65°C	: -10°C~ +65°C
Garantie/ warranty	: 3 Jahre/ years	: 3 Jahre/ years	: 3 Jahre/ years
Barcode/ EAN code	: 4250051901504	: 4250051901511	: 4150051901528

Alle Angaben ohne Gewähr, Irrtümer und Änderungen vorbehalten/ All technical information are supplied without liability

Material Rahmen/ frame Material Rotorblatt/ impeller Lagerart/ bearing system Anschluss/ connector* Einsatzzweck/ operation purpose Verpackungseinheit/packing unit	: PBT (Polybutylenterephthalat) : PC (Polycarbonat) : NB-Longlife Sleeve Bearing : 3Pin Molex (PC) Tachosignal : PC, HDD cases, Multimedia : 60 Stück /pcs			RoHS conform
--	---	--	--	---------------------

* XLP Type : 4Pin Molex (PC), Tachosignal +PWM Signalwire

Inklusive /Included: 4x NB-SLICs