
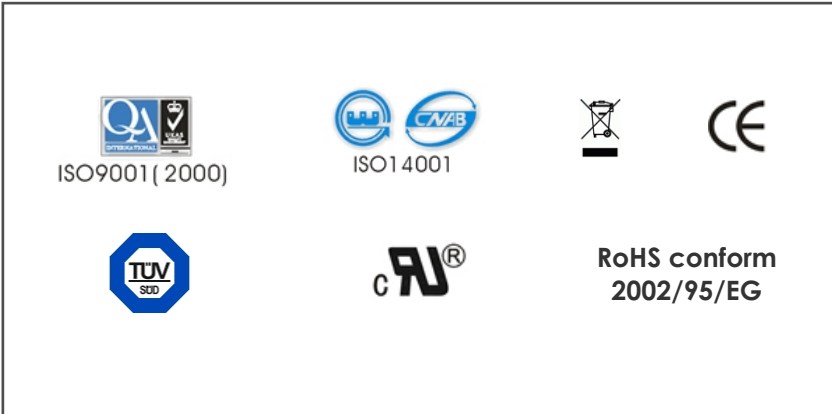


| PHOTO   | MODEL                      | FRAME SIZE | BEARING TYP     | VOLTAGE (V) | CURRENT (A) | POWER (W) | SPEED (RPM)  | AIRFLOW (CFM) | AIRFLOW (m3/h) | PRESSURE (mmH2O) | NOISE (dB/A) | WEIGH (g) |
|---|----------------------------|------------|-----------------|-------------|-------------|-----------|--------------|---------------|----------------|------------------|--------------|-----------|
|  <p><b>NEU !</b></p> <p><b>Retail + Bulk Versionen</b></p> | <b>X1</b><br>low speed     | 80x80x25   | Longlife Sleeve | 12 (6-13)   | 0,06        | 0,90      | 1300 +/- 10% | 16,2          | 28             | 0,7              | 10           | 60        |
|   | <b>X2</b><br>medium speed  | 80x80x25   | Longlife Sleeve | 12 (6-13)   | 0,09        | 1,00      | 1800 +/- 10% | 26,0          | 45             | 1,40             | 18           | 60        |
|   | <b>XE1</b><br>low speed    | 92x92x25   | Longlife Sleeve | 12 (6-13)   | 0,10        | 1,30      | 1400 +/- 10% | 28,9          | 50             | 1,50             | 17           | 75        |
|   | <b>XE2</b><br>medium speed | 92x92x25   | Longlife Sleeve | 12 (6-13)   | 0,11        | 1,50      | 1700 +/- 10% | 37,6          | 65             | 1,70             | 21           | 75        |
|   | <b>XL1</b><br>low speed    | 120x120x25 | Longlife Sleeve | 12 (6-13)   | 0,11        | 1,80      | 1000 +/- 10% | 33,5          | 58             | 1,40             | 16           | 120       |
|   | <b>XL2</b><br>medium speed | 120x120x25 | Longlife Sleeve | 12 (6-13)   | 0,16        | 2,00      | 1400 +/- 10% | 56,7          | 98             | 2,00             | 21           | 120       |



ISO 9001 (2000)

ISO 14001

TUV SUD

RoHS conform 2002/95/EG

CE

**Techdata (all models)**

MTBF/ Lifetime (all models) : < 68 000 hours/Std. (45 C)

Warranty/ Garantie : 2 Years/ Jahre

Scalability/ Skalierbarkeit : Wide range/ hoch

Bearing/ Lagerart : longlife Sleevebearing

Failure rate ~ / Ausfallquote ~ : < 0,15%

Special features (all Models) : 3pin Molex Connector  
: RPM Signalwire

Technische Daten ohne Gewähr, Änderungen vorbehalten

All technical information is supplied without liability